


TYPICAL SIDEWALK with UTILITY STRIP

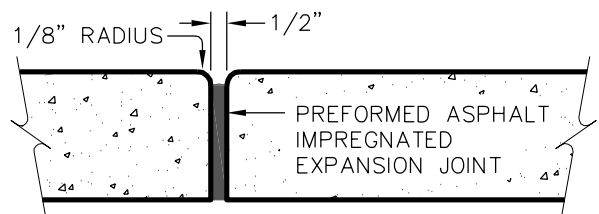

TYPICAL EXPANSION JOINT DETAIL

NOTES:

1. Provide 1" deep tooled traverse structural score joint with 1/8" radius at 5'-0" o.c.
2. 1/2" preformed asphalt impregnated expansion strip joints to be placed 40'-0" o.c. longitudinally, adjacent to curbs, when butting existing structures, concrete, or buildings, and at changes in width.



TOWN of CLAYTON

USE WITH THE TOWN of CLAYTON STANDARD SPECIFICATIONS ONLY

TYPICAL CONCRETE SIDEWALK AND EXPANSION JOINT DETAIL

SCALE: Not To Scale	DETAIL # 2 404.03
REVISION DATE: July, 2010	SHEET #: 1 of 1